2kymen

# 10L Ultrasonic Bath For Acne Needle In Beauty Parlour With 200W Heating Power

#### **Basic Information**

Place of Origin: ChinaBrand Name: Skymen

Certification: CE ROHS FCC SGS

Model Number: JP-040S
Minimum Order Quantity: 1 unit
Price: Negotiation
Packaging Details: 1unit per box
Delivery Time: In Stock

• Supply Ability: 8000 pcs per month



# **Product Specification**

JP-040S Model: • Frequency: 40KHz 2.85 Gallon · Capacity: • Tank Size: 12\*9\*6 Inch 120W/240W • Ultrasonic Power: . Heating Power: 200W Material: SUS 304 8.4KG • G.W:

• Highlight: Benchtop Ultrasonic Bath SUS304,

Bench Top Ultrasonic Cleaner SUS304, Hardware Parts Tabletop Ultrasonic Cleaner



# More Images






#### **Product Description**

#### 10L Ultrasonic Bath For Acne Needle In Beauty Parlour With Heating Power

Why choos us and what benefit can i get?

- 1. We are original manufacture of ultrasonic cleaner, we provide quality and durable product with competitive price, and 1 year warranty.
- 2. 24 hours best service
- 3. Secure packaging to make sure goods deliver your customer without any damage.
- 4. We make standard ultrasonic cleaner with stock, customer do not have to wait long production time.
- 5. We accept OEM service, printed logo are aceptable.

#### **Product Show:**

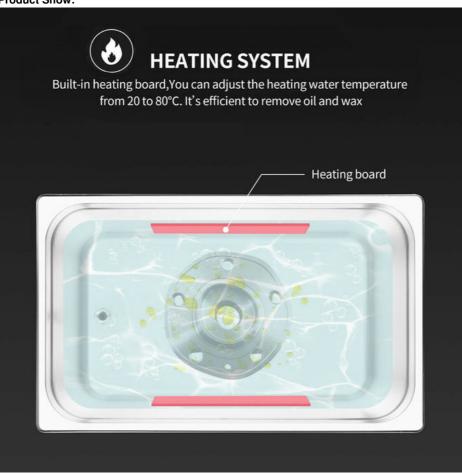





Printed surface stainless steel

fingerprint and dirt resisting






2.

#### SUS304 inner tank

non-welded stamped tank features corrosion and heat resisting

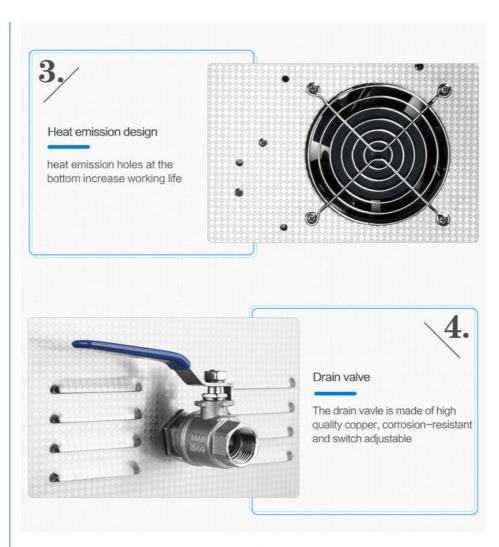



# New Upgrade And Tilted Touch Control Pannel Angle of 20 degrees tilted, user-friendly SKYMEN CLEANING Set C Actual C Dogas TEMP. DEGAS TIME. ONLY TOUCH TOUCH CONTROL PANNEL DOGAS TIME.

# JP-040S 10L Product Show

Heating power 200W

Ultrasonic power **240W** 

Transducer 4 Pcs

Angle of 20 degrees tilted









# PAY ATTENTION ON DETAILS



Insulated handle design
Anti-static and anti-high temperature,
more secure








# Stainless steel drain valve

One-half inch large drain valve, quicker to drain



# **Cooling vents**

Fast heat dissipation, protecting the circuit board and enhancing the service life








# Heat - resistant power cord

One-half inch large drain valve, quicker to drain





# Non-slip anti-shock pad

Non-slip, safer







Safety switch

With ground insurance switch



# Stainless steel cleaning basket

Fine workmanship and durability



#### **Application Area:**

# **MULTIPURPOSE CLEANING**

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.



Glasses







Tableware



Toothbrush



Denture



Bottles&nipples

Nail Tools















# COMPARISON OF CLEANING EFFECT




























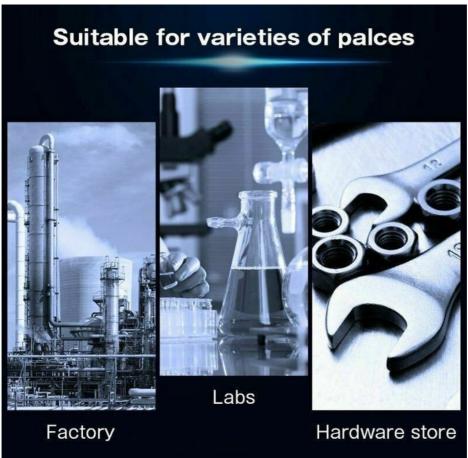



# **PRODUCT FEATURES**

- mechanical timing:
  The working time adjustable from 0-30 minutes or normal open mode.
- mechanical control:
  mechanical control heater, 20-80 adjustable,temperature error within +-2
- high quality bath:
  High quality SUS 304 stainless steel punch forming bath with noise proof
- anti-skid treatment:
  the machine is steady with the non-slip,shock-proof,anti-static,pressure-proof mats at the bottom
- ceramic heater:

  New ceramic heater is stable and efficient
- Humanized design,remarkable cleaning effect:
  Tank capactity over 6L with the drain vavle; high cleaning efficiency, no harm to surface

Stainless Bench Top



Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency	Tank thickness	Material
	(L)	(L*W*H)mm	(W)	(W)	(KHz)	(mm)	SUS304
JP-008	0.8	150*85*65	35	0	40	1	SUS304
JP-009	0.9	150*135*65	60	100	40	1	SUS304
JP-010T	2	150*165*100	60	100	40	1	SUS304
JP-020S	3.2	240*135*100	120	100	40	1	SUS304
JP-030S	4.5	300*150*100	180	200	40	1	SUS304
JP-031S	6.5	300*150*150	180	200	40	1	SUS304
JP-040S	10	300*240*150	240	200	40	1	SUS304
JP-060S	15	330*300*150	360	300	40	1	SUS304
JP-080S	22	500*300*150	480	500	40	1	SUS304
JP-100S	30	500*300*200	600	500	40	1	SUS304

# Industrial Ultrasonic Cleaning Machine



Model	Capacit	Tank Size	Transducer	Ultrasonic	Heating Power	Tank thickness	Frequency
	У		s	Power	i rodiiiig r orror	Turn timorarooo	
	(L)	(L*W*H)mm	(pcs)	(W)	(W)	(mm)	(KHz)
JP-120ST	38	500X300X250	12	600	1500	2	28/40
JP-180ST	53	500X350X300	18	900	1500	2	28/40
JP-240ST	77	550X400X350	24	120	3000	2	28/40
JP-300ST	99	550X450X400	30	1500	3000	2	28/40
JP-301ST	99	800X300X400	30	1500	3000	2	28/40
JP-360ST	135	600X500X450	36	1800	4500	2	28/40
JP-480ST	175	700X500X500	48	2400	6000	2	28/40
JP-600ST	264	800X600X550	60	3000	6000	2	28/40
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40
JP-	540	1000X900X600	108	5400	18000	2	28/40
1108ST	340	1000/000/000	100	5700	10000	-	20/40
JP-	960	1200X1000X800	144	7200	27000	2	28/40
1144ST	550	12007(10007000		, 200	2,500		20,40

# Immersible Transducer Plate Image:





Model	Plate Size	Transducer s	Ultrasonic Power	Generator	Suitable tank
	(L*W*H)mm	(pcs)	(W)	(set)	(L)
JP-1006I	305*205*100	6	300	1	10~15
JP-1012I	355*305*100	12	600	1	30~40
JP-1018I	340*280*100	18	900	1	60~70
JP-1024I	430*280*100	24	1200	1	70~80
JP-1030I	460*370*100	30	1500	1	90~100
JP-1036I	550*450*100	36	1800	1	130~140
JP-1048I	600*450*100	48	2400	2	170~180

#### Immersible Transducer Tube Image:



1.5

	Tube Size	Transduce	Ultrasonic Power	Generat	Length of wire	
Model		rs		or		
	(D*H)mm	(pcs)	(W)	(set)	(M)	
JM-1003	57*180	3	150	1	1.5	
JM-1006	57*300	6	300	1	1.5	
JM-1012	57*550	12	600	1	1.5	
JM-1018	57*750	18	900	1	1.5	
JM-1024	57*1000	24	1200	1	1.5	
JM-1036	57*1520	36	1800	1		

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.



# **Skymen Technology Corporation Limited**



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen